### think process!

### think process!

### **BOB 3000**

ТҮРЕ	WEIGHT RANGE	CAPACITY
BOB 3000	<2200 gr	<3000 pcs/h. depending on weight and recipe
DIMENSIONS	WEIGHT	CONNECTED LOAD
Length 3264 mm	nettkg	230/400 V 3 ph 50 Hz
Width 800 mm	grosskg	drive moulding belt 2x 0,75 kW
Height 1920 mm		drive discharge belt 0,37 kW
		drive flour duster 0,12 kW

### OPTIONS


#### Second flour duster

- Discharge conveyor executed as positioning / step belt
- Customer specific Blue Box

#### WP BAKERY GROUP USA

2 Trap Falls Road, Suite 105, Shelton, CT 06484  $\,//\,$  Phone 203-929-6530  $\,\,//\,$  Fax 203-929-7089 info@wpbakerygroupusa.com  $\,//\,$  www.wpbakerygroupusa.com

© 2015 by WP Haton BV, Stand 08/2015 printed in Germany \* = eingetragenes Warenzeichen Sämtliche Angaben sind unverbindlich. Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten.

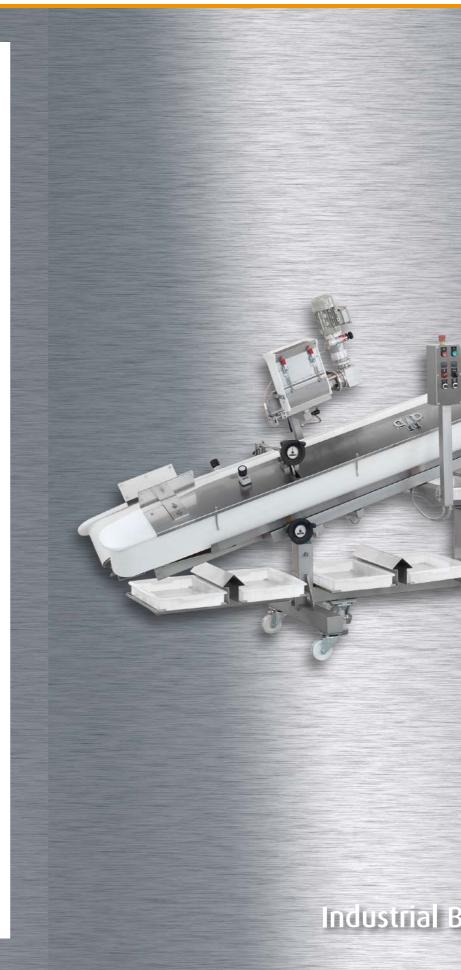



0 -

# BOB 3000

Industrial Belt Rounding Machine

### WP BAKERYGROUP

## **BOB 3000**

DEVELOPED ESPECIALLY FOR BREAD LINES WITH HIGH CAPACITIES, MANY PRODUCTION HOURS AND A HIGH DEGREE OF AUTOMATION. THE BELT **ROUNDER CAN BE USED FOR THE PRODUCTION OF ROUND DOUGH PIECES** MADE OUT OF WHEAT, RYE OR OTHER DOUGHS WITH A LOW GLUTEN CON-TENTS OR VERY STICKY DOUGHS. BOB 3000 HANDLES DOUGH WEIGH UP TO 2200 GR. WITH AN OUTPUT UP TO 3000 PCS/HR.

#### Picture BOB 3000


### **BASIC EXECUTION:**

#### Frame stainless steel


- 2 felt belts in V shape
- 1 fixed speed for one belt / one belt driven by frequency inverter
- I flour duster with frequency inverter
- Quick lock adjustment of belts


### BENEFITS

- Frequency regulated belt speeds for variable rounding characteristics
- Quick lock adjustment of the belts for easy cleaning
- 3 way adjustment of the rounding path bottom path (by opening the V belt) - top (by opening the angle) - middle V (by adjusting the insert pieces)
- Use of plastic materials for easy cleaning
- Frame and other important parts out of stainless steel
- Flour duster frequency inverter and integrated dough detector
- Discharge conveyor can be used as positioning belt option
- Plastic containers underneath belt rounder path
- The BOB 3000 is movable
- Rounding path is approx. 3 mtr.



1920



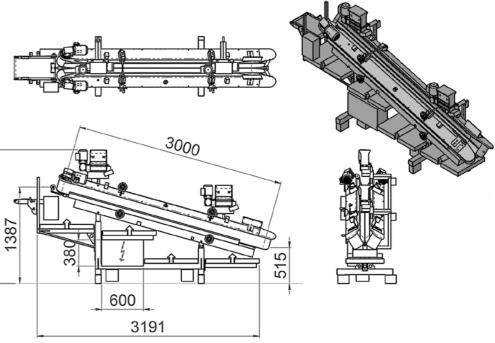







• Rounding path can be adjusted by opening the angle of the belts, top and bottom as well as adjusting the inserts

- Discharge conveyor with fixed speed
- Rounding path 3000 mm

Illustration BOB 3000