

## COMBI U

TYPE	WEIGHT RANGE	CAPACITY
Combi U straight version	200 - 2000 gr	max. 2500 pcs/h.
Combi U inclined version		depending on dough weight

DIMENSIONS		WEIGHT	CONNECTED LOAD
Lenght	mm*	nett 880 kg	230/400 V, 50 Hz + earth
Width	mm*	gross...950.kg	1,5 kVA
Height	mm*	Shipping volume depending on execution	

\* Standard Combi U version

### OPTIONS

- Driven moulding belt instead of pressure board
- Bypass for round dough pieces
- Flour duster with own drive for wheat or rye
- Pressure board for pointed ends
- Decoration station
- Receiving plate Teflon / felt
- Panning device
- Twister Swing Away
- Tin signalisation
- Customer specific Blue Box

#### WP BAKERY GROUP USA

2 Trap Falls Road, Suite 105, Shelton, CT 06484 // Phone 203-929-6530 // Fax 203-929-7089  
 info@wpbakerygroupusa.com // www.wpbakerygroupusa.com



# COMBI U

## Long Moulder

# COMBI U

Picture Combi U inclined version with optional second pressure board and by pass

**SUITABLE FOR WHEAT, WHEAT/RYE (30-70% RYE) AND RYE DOUGHS, AS WELL AS VERY WET DOUGHS.**



## BENEFITS

- Perfect moulding results of both stiff and soft doughs
- Machine capable of handling round, long and flat dough pieces / non sheeted only folded doughs – by pass
- Perfect sheeting by means of 1 pair of sheeting rollers and 2 driven flattening rollers made of dough resistant material and provided with scrapers
- Easy cleaning of rollers
- Hinged pressure board with V
- Adjustable stainless steel curling net
- Precise centering of dough pieces before sheeting/ long moulding
- Adjustable Teflon coated side guides
- Modern design in stainless steel
- Low noise level through geared belt drive
- Easy to operate and to maintain

## BASIC EXECUTION:

- Infeed conveyor standard or lengthened with adjustable driven centering rollers
- Cover plates stainless steel
- Moulding bridge glass bead blasted straight or oblique
- Adjustable 1st roller pair made out of Arnite with Arnite scrapers opening < 125 mm, roller diameter 125 mm length 400 mm
- Adjustable synthetic rollers and 2 flattening rollers with scrapers, H 125 mm
- Adjustable stainless steel curling net
- Hinged pressure board, adjustable in height with adjustable Teflon coated side guides
- Hinged pressure board flat or with 1xV or 2xV
- Maximum moulding length 560 mm
- Undercarriage with wheels, 2 fixed / 2 swivel castors

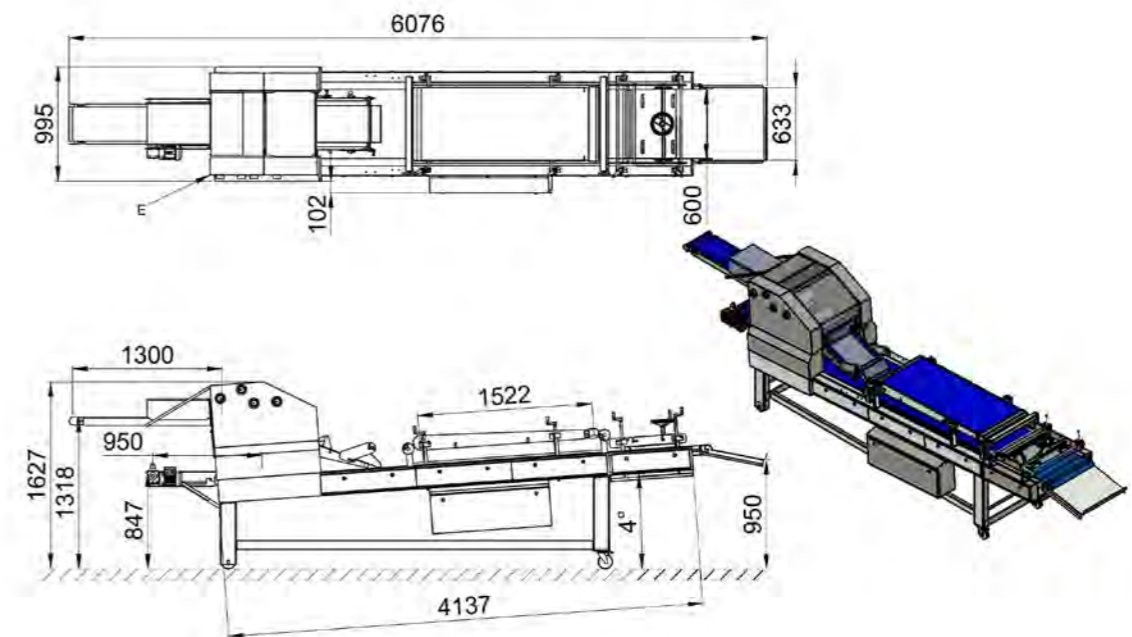


Illustration Combi UL inclined version with optional second pressure board and by pass