

TECHNICAL DETAILS	DLA Donut 660-2	DLA Donut 660-3
Height (upper edge of grease tray)	34,3 "	34,3 "
Voltage	208-240 V/60 Hz	208-240 V/60 Hz
Heating power	28 kW	42 kW
Total power	29 kW	43 kW
Filling quantity	47,29 gal.	70,39 gal.
Usable width	25,98"	25,98"
Usable length	60,47"	93,15"
Space between bars (standard)	4,69"	4,69"

**WP BAKERY GROUP USA**

2 Trap Falls Road, Suite 105, Shelton, CT 06484 // Tel. 203-929-6530 // Fax 203-929-7089  
 info@wpbakerygroupsusa.com // www.wpbakerygroupsusa.com




# Donutmaster DLA 660

Perfect donuts

**WP BAKERYGROUP**



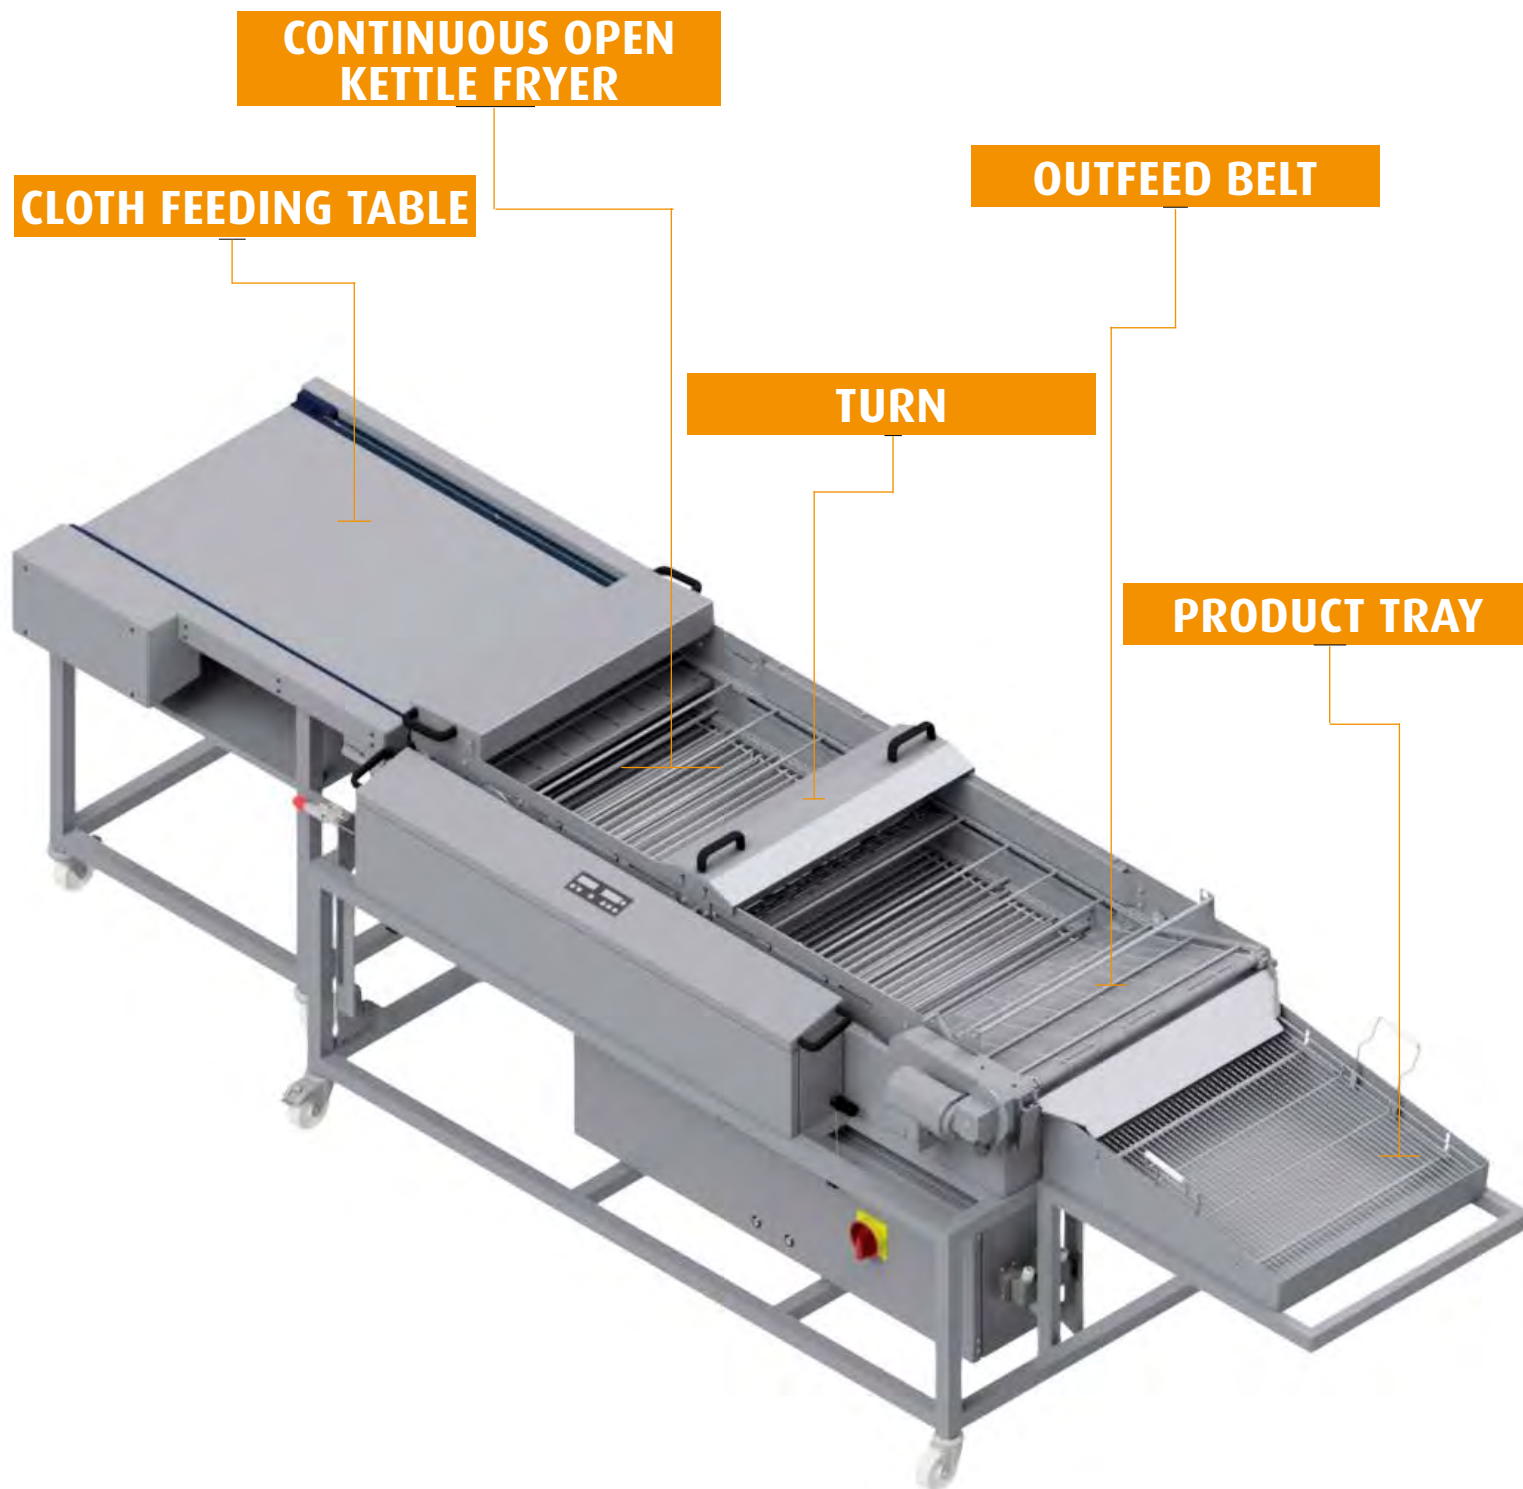

**CLOTH FEEDING TABLE**

- Input width 660
- Manual input via polyester cloths with hollow seam and transport bars
- Integrated collecting drawer for cloths/bars
- Can be moved on two lockable castors
- Operated via the fryer's glass display controller
- Cloth feeding table can be removed and replaced with a dispensing unit (e.g. cake donuts, crullers, curd cheese dumplings)

**CONTINUOUS OPEN KETTLE FRYER**

- Four separate heating zones that can be controlled independently
- Each heating zone has its own safety thermostat
- The cycled heating control prevents fat from burning on the heating coils
- Distance between bars available on customer request

**BENEFITS**

- Seven storable programs for consistent quality
- Uniform frying results
- Reduced grease absorption thanks to digital heating control
- Automatic feeding makes work easier
- Tool-free removal of the transport units and heater makes cleaning easy
- Quality "Made in Germany"

**TURN**

- Optionally available with two turns

**OUTFEED BELT**

- For gentle outfeed of products
- For draining excess oil

**PRODUCT TRAY**

- Removable collecting grate
- For cooling the products
- Collecting tray can also be used as a sugar tray

