

## AF 2002

TYPE	NET CONTENT	WEIGHT RANGE	DIAMETER CUPS	PROOFING TIME AT 1500 PCS/H.
8 rows	288 pockets	200 - 1200 gr	190 mm	<11 minutes
10 rows	450 pockets	100 - 700 gr	140 mm	<18 minutes
12 rows	432 pockets	200 - 1200 gr	190 mm	<17 minutes

Continuous trays, content depending on dough weight, capacity and proofing time. Other weights upon request.

CAPACITY	CONNECTED LOAD
max. 1500 pcs/h.	230/400 V, 50 Hz + earth

### OPTIONS

- Retraction belt on discharge conveyor for long pre-moulded dough pieces
- PLC control with touch screen
- Automatic Climate control
- Infeed conveyor with pre moulding station and flour duster
- Customer specific Blue Box

#### WP BAKERY GROUP USA

2 Trap Falls Road, Suite 105, Shelton, CT 06484 // Phone 203-929-6530 // Fax 203-929-7089  
 info@wpbakerygroupusa.com // www.wpbakerygroupusa.com



**AF 2002**  
 Intermediate Proofer



# AF 2002

Picture AF 2002 / 8 row

SO CALLED STATIC INTERMEDIATE PROOFER FOR ROUND AND FOR PRE-MOULDED OBLONG DOUGH PIECES IN CUPS OR TRAYS. DOUGH PIECES ARE RESTED WITHOUT TURNING DURING THE PROOFING PROCESS. THE AF 2002 PROOFER IS ESPECIALLY SUITABLE FOR SOFT AND PRE-FERMENTED DOUGHS WITH A LONG FLOOR TIME. ALL TYPES OF MOST COMMON DOUGHS CAN ALSO BE HANDLED EASILY.



## BENEFITS

- V-belt infeed system through pneumatics
- Robust construction
- No painted parts
- Static proofer – dough friendly process
- Different proofing time possible
- No turning station, dough pieces are not moved
- Execution with cups or trays
- Pre-moulding station for oblong dough pieces

- Handling of round and oblong dough pieces
- Discharge conveyor with retraction belt (option)
- PLC control with touch screen and recipe control (option)
- Modular frame made of closed tubular profiles, cover in stainless steel plate
- UV lights to prevent mould forming
- Plexiglas windows for visual inspection and control of process

## BASIC EXECUTION:

- Infeed conveyor with flour duster
- Infeed belt controlled by photo-cell
- Proofer runs intermittent
- Pockets polyethylene Ø 190 mm
- Stainless steel trays with felt trays
- With exhaust fan, ultraviolet light, stop switch for correct tray in- and out-feed position

- Out-feed with sorting flap
- Discharge conveyor with own drive
- Cover plates and frame in stainless steel
- UV lamps
- Plexiglas windows

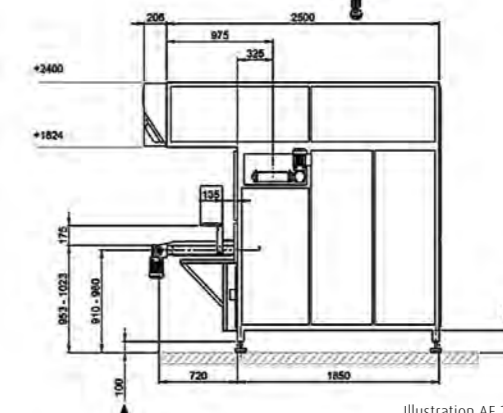
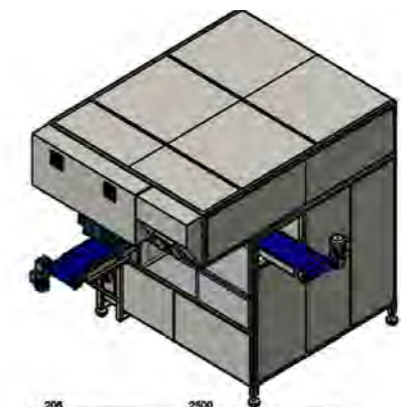
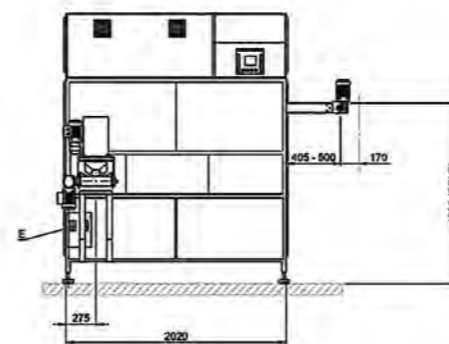
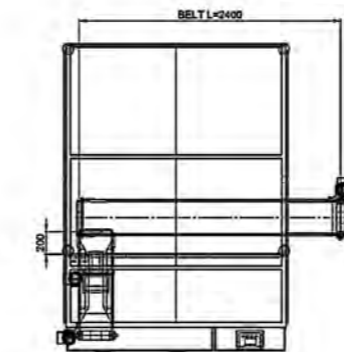


Illustration AF 2002 / 8 row / 288 pockets net